
MIRA.S

KLARIS

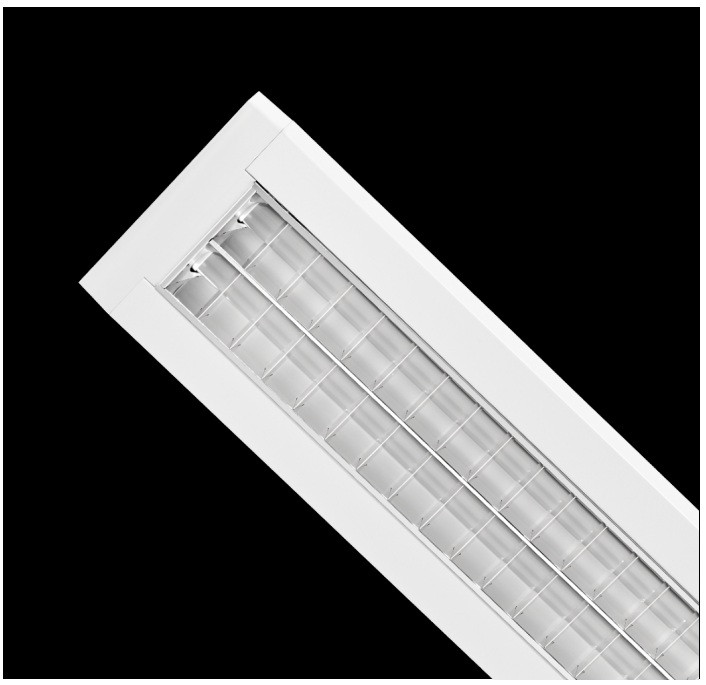

Up to 145 lm/W
L80 B10 70.000h

Instructions of use and Declaration of conformity:
https://klaris.ro/en/product/mira/

Standard:

LED | IP20 | IK07

220 -240V 50/60Hz | CL I | 650°


CE | RoHS compliant | CRI80

Options:


DIM | COOL WHITE

CRI90 | 

110 -277V 50/60Hz | 







	L	W	H
MIRA.S L1200	1245	175	40
MIRA.S L1500	1545	175	40

TYPE	optic	CRI	CCT	Flux (lm)	Total Power (W)	Efficacy lm/W	UGR	TA	WEIGHT kg	unit / cart	unit /palet
MIRA.S 2LM12 4000/830 DPB	DPB	80	3000	4000	29.0	138	<19	+10°C / +40°C	2.8	1	80
MIRA.S 2LM12 4200/840 DPB	DPB	80	4000	4200	29.0	145	<19	+10°C / +40°C	2.8	1	80
MIRA.S 2LM15 5000/830 DPB	DPB	80	3000	5300	39.0	136	<19	+10°C / +40°C	3.4	1	80
MIRA.S 2LM15 5300/840 DPB	DPB	80	4000	5500	39.0	141	<19	+10°C / +40°C	3.4	1	80